


Victorian Winding Drum Elevator

Jobsite Preparation Checklist





Hoistway Measurements

All measurements must match the approval drawings.

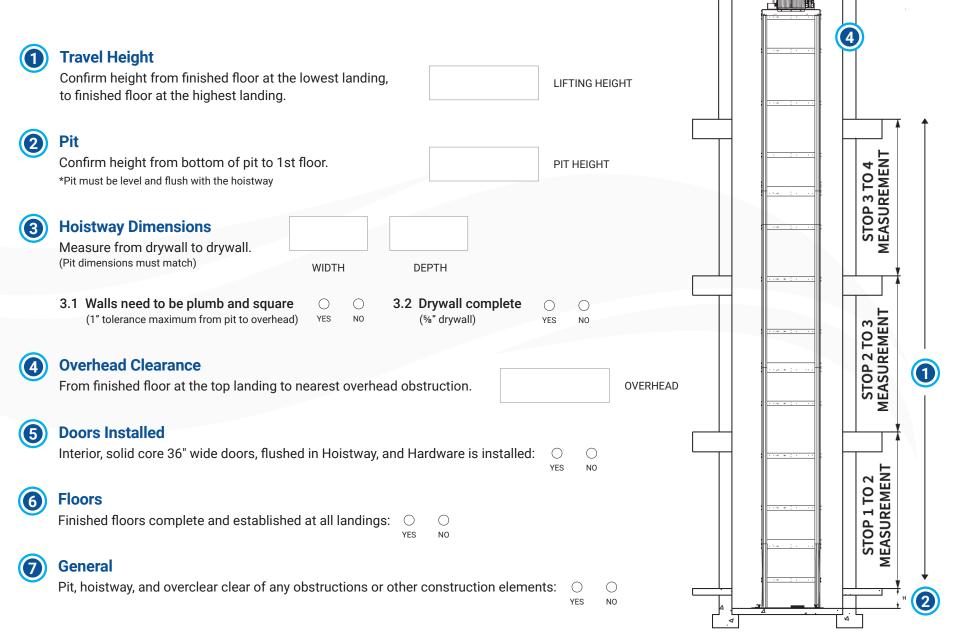


Rail Wall Construction - Wood Wall

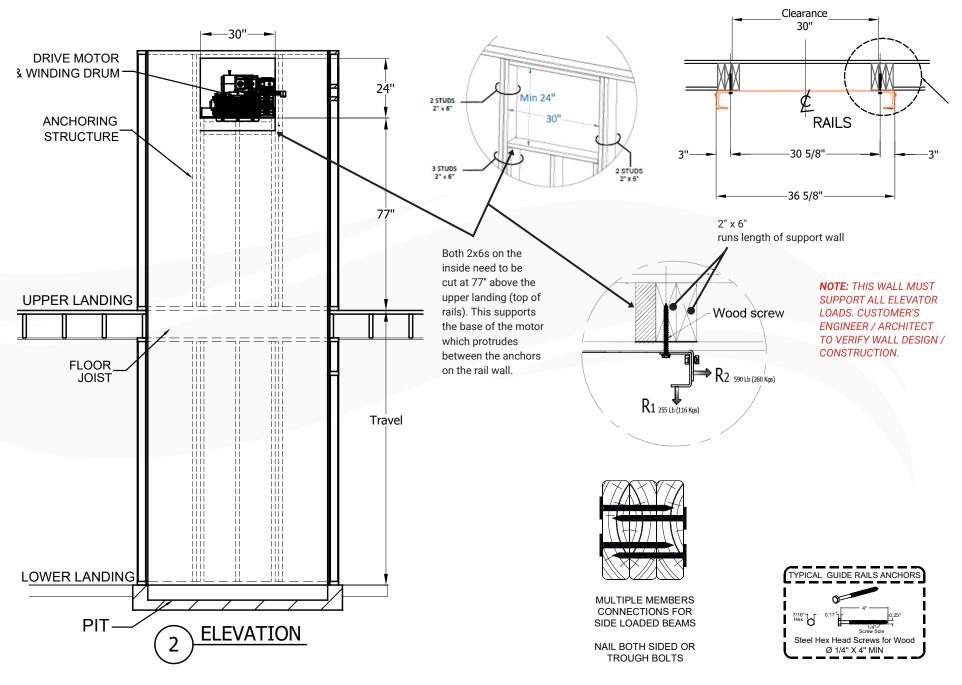

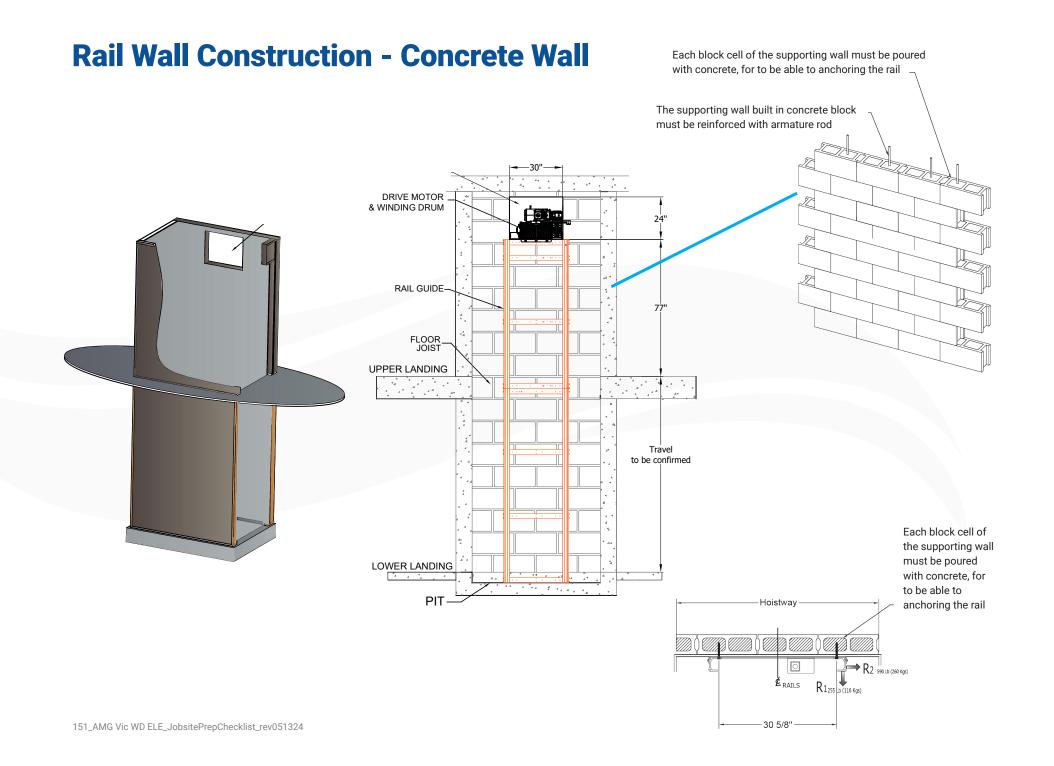

Rail Blocking - Loads

Confirm that loads have been reviewed and approved by a local engineer.

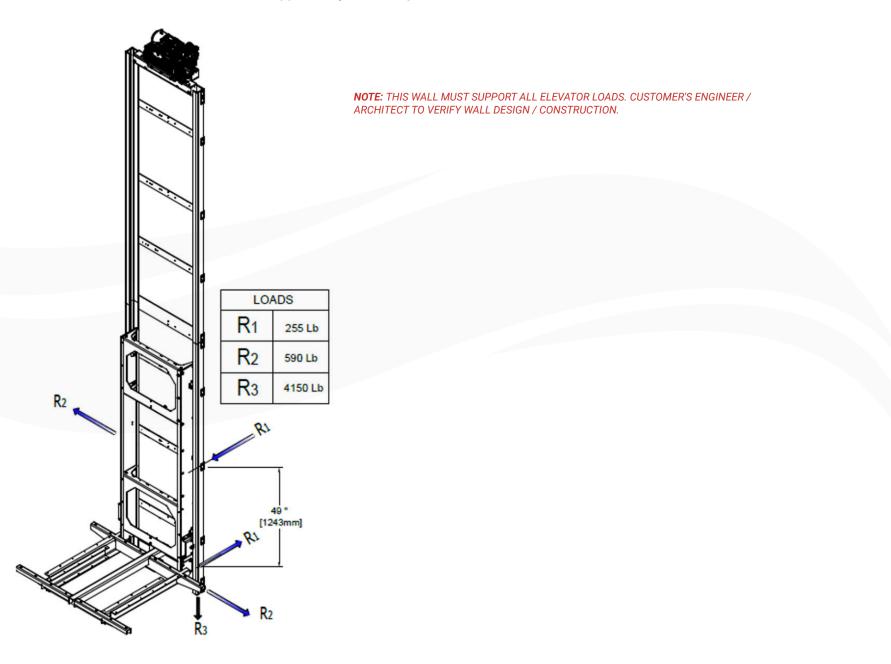

Machine Room / Space Lighting and Service Receptacle

Provide a 120 vac gfci duplex receptacle at the machine location. Provide adequate lighting in the machine space with a switch located within easy reach of the point of entry. Power to be supplied from distribution panel as an independent branch circuit. Provide a telephone line to the machine room and connected to the elevator controller.


Lighting Supply Disconnect

15 amp fused lockable disconnect switch for 120-1-60 power supply. Power to be supplied from distribution panel as an independent panel as an independent branch switch circuit. Switch to be fused at 15 amp.

Main Disconnect

Fused lockable disconnect switch for main power supply provided with neutral. Switch must also be provided with an auxiliary contact designed to open when the disconnect switch is opened.

NOTE: CLEARANCE AND MACHINE ROOM DOOR REQUIREMENTS VARY BY REGION. THE CLEARANCES SHOW RECOMMENDATION ONLY. CONSULT LOCAL BUILDING CODES TO ENSURE COMPLIANCE.

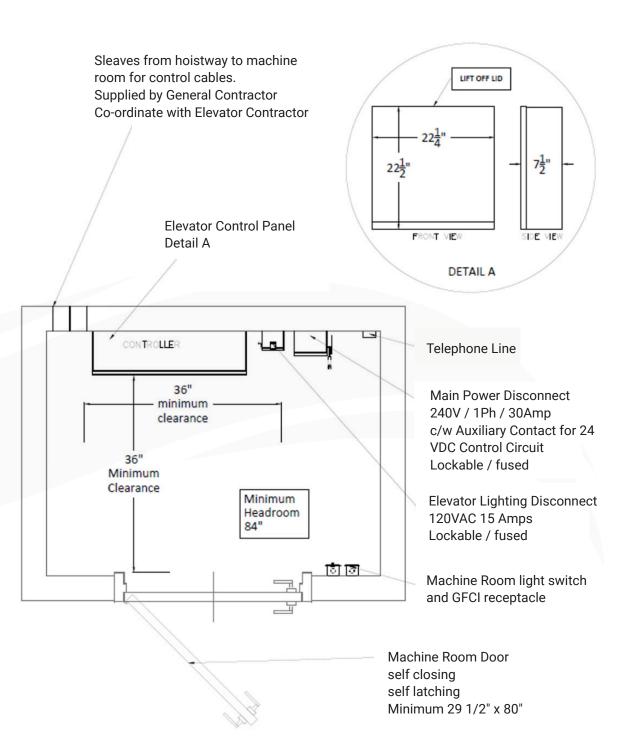

Electrical Requirements

Confirm that every step is complete.

- Electrical contractor to provide (1) one only 240 V 30AMP 1 Phase circuit for the elevator pump unit / motor located in the elevator machine room.
- Electrical contractor to provide (1) one only 240 V 15AMP 1 Phase circuit for the elevator cab lighting located in the elevator machine room.
- A switched light and duplex receptacle (Class A ground fault circuit interrupter type) must be installed in the elevator machine room.
- General contractor or customer to provide telephone lines into the elevator machine room with 10' coil.



Jobsite Preparation Checklist

Name:	Address:
Phone Number:	

Please provide the following photos:

Hoistway: 2 photos per landing (1 from the landing, and another one showing the inside of the hoistway)

Rail wall blocking. Please send a picture showing the blocking behind the drywall.

Room: Show the electrical requirements detailed at page 7

Notes:

Machine

I hereby certify that the information provided on this form is true and accurate. Any discrepancies that require the install crew to delay or leave the job site will incur a minimum \$1,500 redeployment fee (Travel expenses will be extra) and must be paid in advance.

Signature: _____

Date:

Builder/Homeowner Representative Signature