



# AmeriGlide Wheelchair Elevator Lift Technical Specifications

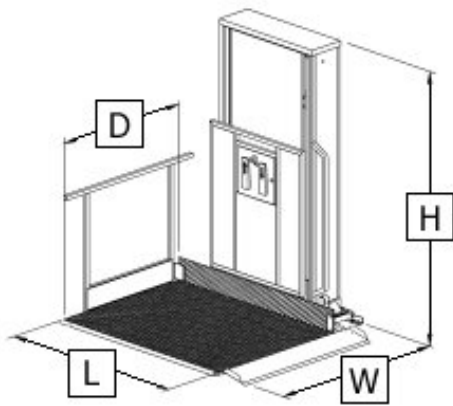


**Adjacent Access**

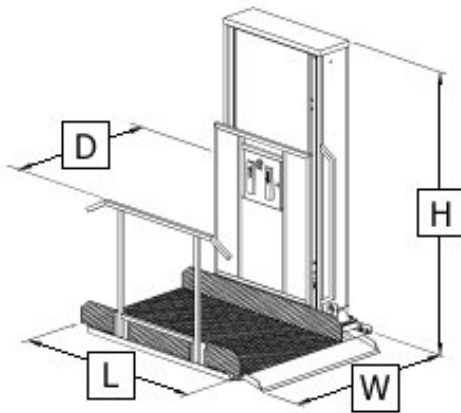

**Straight Through Access**

*engineered for your independence...*

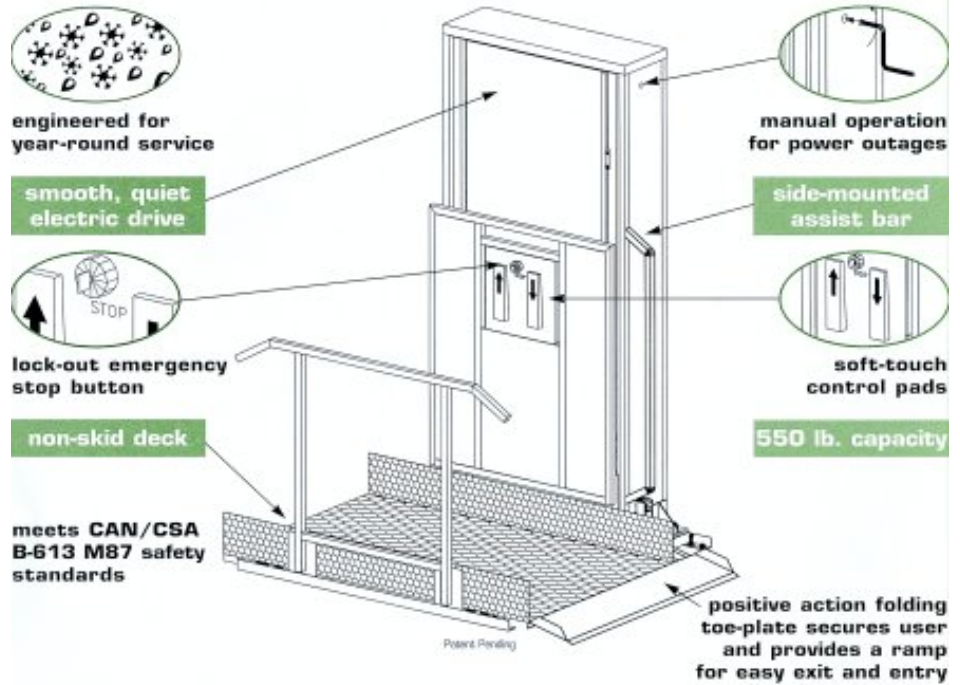

Deck Dimensions (L, D, W)			
Access	L Deck Length	D Deck Width	W Total Width
Straight Through Access	54" (1372 mm)	34" (864 mm)	48" (1219 mm)
Adjacent Access	54" (1372 mm)	40" (1016 mm)	54" (1372 mm)

Tower Dimensions	
Total Travel	Tower Height
52" (1321 mm) Lift Height	72" (1829 mm)
72" (1829 mm) Lift Height	92" (2337 mm)
96" (2438 mm) Lift Height	118" (2997 mm)
120" (3048 mm) Lift Height	142" (3607 mm)
144" (3658 mm) Lift Height	166" (4216 mm)

- Constant pressure Soft Touch control pads
- 550 pound (250-kg) lift capacity
- Constant pressure Soft Touch control pads
- 8 feet/minute lift speed
- Direct worm gear/acme screw drive
- Non-load-bearing backup safety nut on lift shaft
- Low maintenance
- Expanded metal platform with full under platform visibility and non skid surface

### **Options**

- Under platform safety plate and solid platform
- Carriage gate
- Landing gates
- Portable model
- Solid Hand Rail
- 12V DC battery backup
- 18" extra wide toe plate
- Remote call stations
- Electric Interlocks

### **Technical**

- 8" positive action, reversible toe-plate for universal access
- Emergency manual operation
- Fuse box accessible from carriage
- Quick and easy set-up and adjustment
- Baked on Powder Coat finish
- Baked on Powder Coat finish
- Extreme Weather resistant design
- U.L. and C.S.A. Certified