THE RAVE STAIR LIFT






Ultra-Thin Design
Great for narrow cases

Heavy Duty
Supports up to 350 lbs.

Easy to Install
Save on Installation Fees



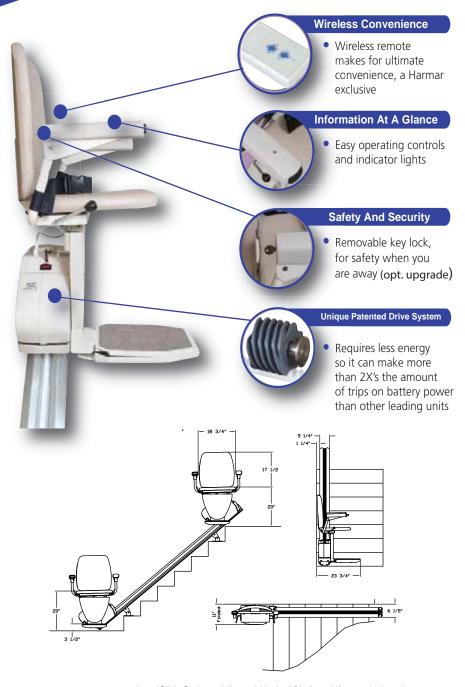

AmeriGlide Stairway Lifts and Vertical Platform Lifts are designed to meet ANSI/ASME A18.1 Performance Safety Standards when properly equipped. While AmeriGlide Stairway Lifts and VPLs meet National standards it is imperative to check State and Local code requirements before installing to ensure compliance. All local and State compliance is the responsibility of the purchaser.

Maximum weight capacity	350 lb.
Electrical requirements	115 VAC
Operation power	24V DC Battery
Maximum travel	70 ft
Speed	17 ft/min.
Incline Limits	32 – 52 degrees
Drive system	Polymer worm/worm-rack
Motor output speed at rated	load 62 rpm
Motor output torque at rated	l load 18 lb ft
Motor output amps at rated	load 14 Amps
Track (rail) type	Extruded aluminum
Average return trips per char	ge 20 – 40
(varies with load, length)	
Tools required to install	5
Symmetrical lift (left or right	stair) Yes
Interchangeable arms (left or right hand operation) Yes	
Need to open chassis to install or change sides? No	

- Standard unit is 12ft, additional lengths available up to 70ft
- Easily changeable from left to right side
- Patented helical worm drive
- No greases or lubricants; easy to vacuum and keep clean
- Made in the USA!
- Aesthetically pleasing appearance and robust construction
- Narrowest stairlift in the industry
 only 11" folded
- Comfortable seat with height adjustment
- Swivel seat at upper landing, for easy and safe entry and exit
- Safety sensors that stop the lift when it meets with an obstruction
- 90 Day warranty on parts